

# DELTA<sup>®</sup>-SEAL for greater corrosion protection

DELTA<sup>®</sup>-SEAL is an exclusive coating to SPAX and provides clear advantages over traditional coatings:

- Exceeds the corrosion protection when compared with class 4 hot-dipped galvanised products\*
- Ideal for use in CCA, ACQ and LOSP treated timbers
- Free of chrome(IV) so more environmentally friendly than traditional coatings
- Includes a glidecoat lubricant coating for reduced torque during installation
- Suitable for use in any external environment away from direct exposure to sea water



Galvanised screw after 12 months in ACQ treated timber.




SPAX DELTA<sup>®</sup>-SEAL after 12 months in ACQ treated timber.

## Salt-spray test according to DIN EN ISO 9227 over a period of 1008 hours



Hot-dipped galvanised screws.  
Showing significant base material corrosion.

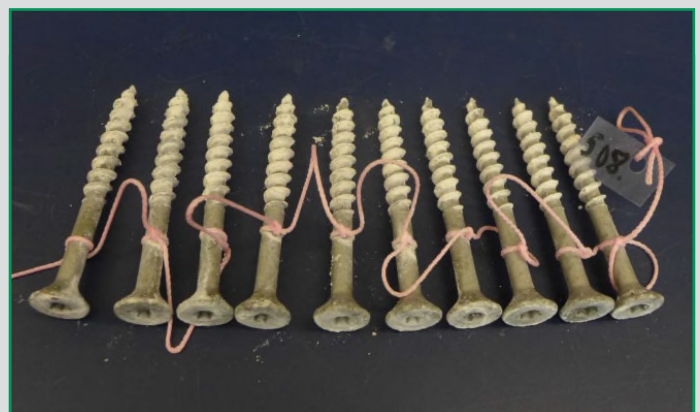

DELTA<sup>®</sup>-SEAL screws.  
No base material corrosion.

\*Test report comparing DELTA<sup>®</sup>-SEAL with class 4 hot-dipped galvanised screws available on request.